3 dB Cellular / 3 dB PCS Magnet Mount Antenna

ASPRDM1994 series

For best results, the assembled antenna should be placed in the center of the roof or trunk lid. This position will provide best performance. Use on vinyl tops is not recommended since the holding power will be reduced through the vinyl. The magnet will not stick on aluminum or nonmetallic surfaces. The assembled antenna has been tested to withstand air speeds consistent with legal speed limits. **The magnet will hold securely unless ice, dirt or other obstructions prevent the flat antenna base from seating properly. Always make sure antenna base is on a clean, flat, painted or unpainted metal surface.**

ASSEMBLING ANTENNA

1. Assemble whip onto magnet base as shown in Figure 1. Tighten securely by hand. (Using a wrench may mar the finish, and over tightening could cause damage to the magnet base).

TO MOUNT ANTENNA

1. Clean bottom of antenna mount and mounting location each time before mounting to remove material that may scratch vehicle finish. **Do not remove plastic from bottom of magnet base.**
2. Hold antenna directly over mounting location and carefully lower it into place. **Do not slide the antenna while on vehicle or scratches may result.**

TO REMOVE ANTENNA

1. Grasp mount firmly and tilt antenna to one side, then pull up. **Do not slide antenna to remove it or scratches may result.**

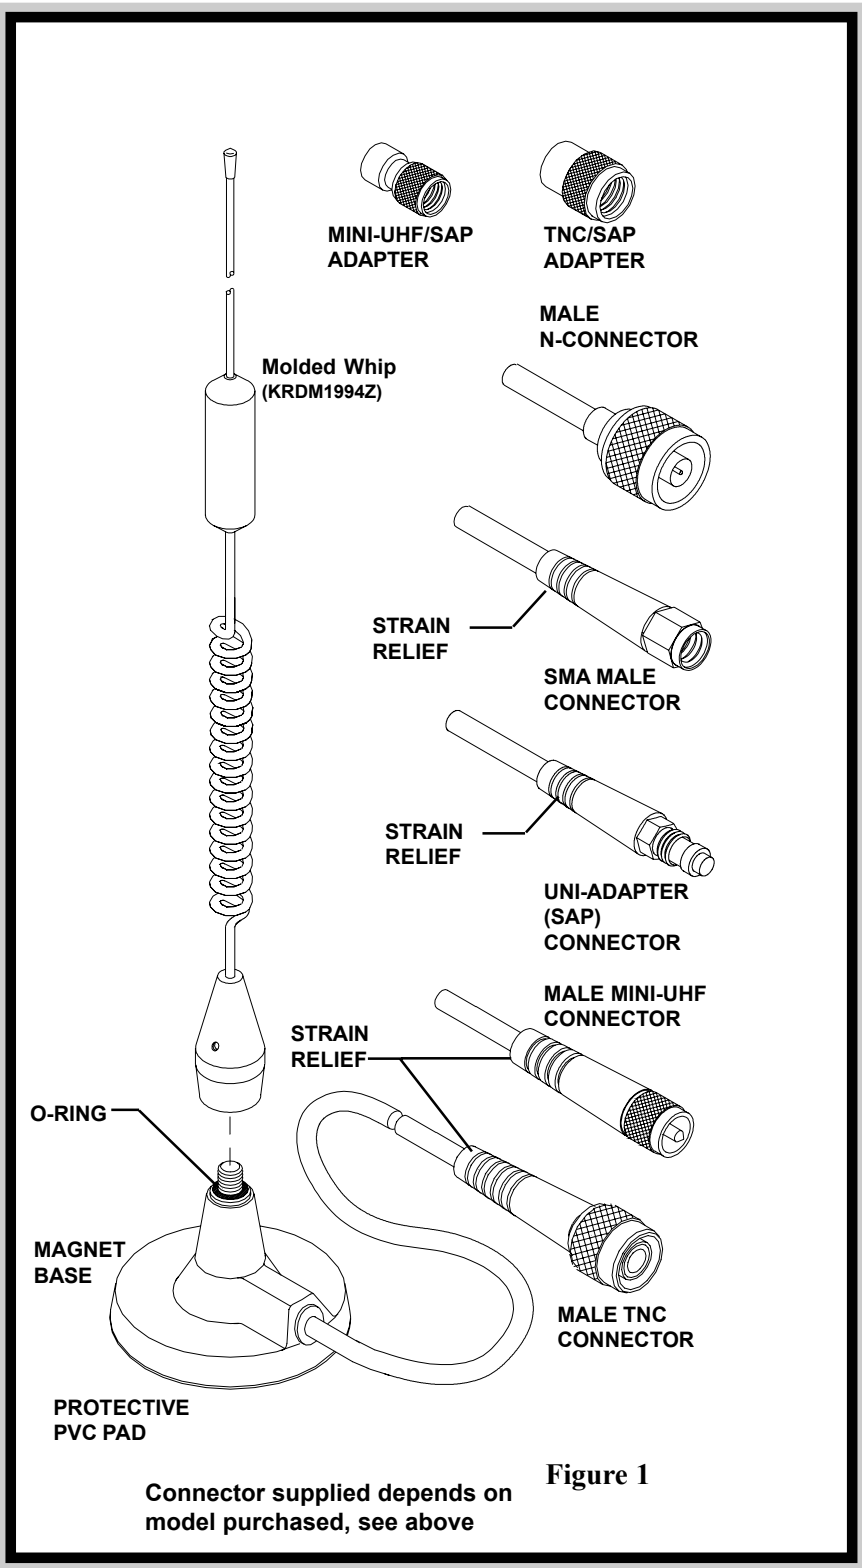

Figure 1

This antenna is supplied to cover the frequency range specified. No tuning or adjusting is required.

Printed in U.S.A.
27-9367-7 Rev. H 4/08

PCTEL, Inc.
471 Brighton Drive
Bloomingdale, Illinois 60108-3102
ph. 630-372-6800 fax. 630-372-8077
Sales Toll Free: 1-800-323-9122
www.antenna.pctel.com